


DLA2-24D3



- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I<sub>max</sub> (1x 8/20us)
- 5kA I<sub>imp</sub> (2x 10/350us)
- 10kA I<sub>n</sub> (10x 8/20us)
- Modular
- 4W+SHIELD+G

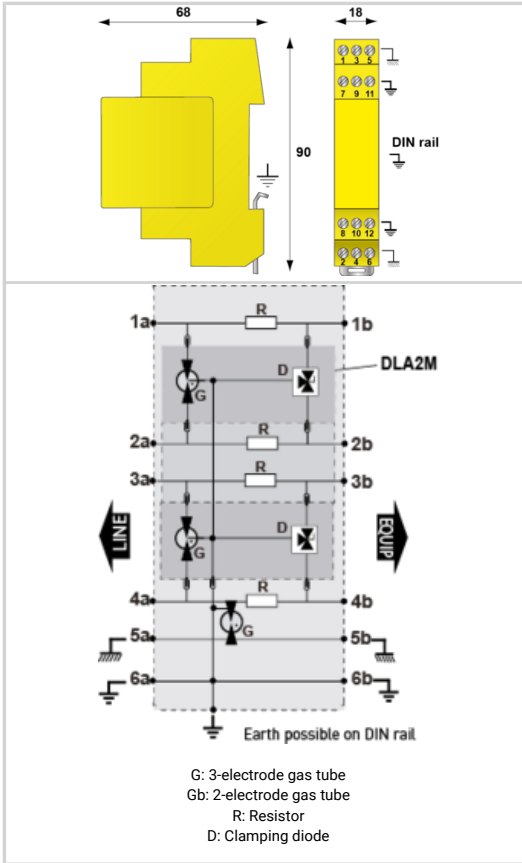

Electrical Characteristics		
Max. load current	IL	300 mA
Impulse current 2 x 10/350µs Test - D1 Category	I <sub>imp</sub>	5 kA
Nominal discharge current C2 Category	I <sub>n</sub>	5 kA
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	24
WIRES		4W+SHIELD+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	40
MCOV	(V)	28/
IMAX 8/20µs	(kA)	20
I <sub>imp</sub> 10/350µs	(kA)	5
DATA SPEED	(Mbps)	up to 10MHz
FREQUENCY	(MHz)	up to 10
INSERTION LOSS (@ FREQ)	(db)	< 1
CAPACITANCE	(pF)	< 50
Mechanical Characteristics		
Operating and storage temperature		-40/+85°C
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		2 Channel (4W+SHIELD+G)
CONNECTION METHOD		Screw Terminal
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLA2M-24D3
Standards		
Certification		UL Listed
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
640311		