



### DLA2-48D3

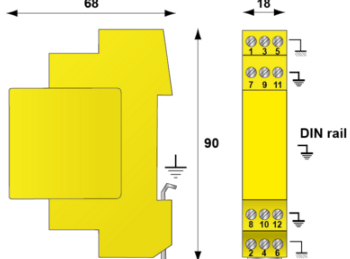

- Din rail plug-in surge protector
- 2-pair
- Un: 48 V
- Shield wire protection
- Without line cut-off
- IEC 61643-21 compliance
- UL497A

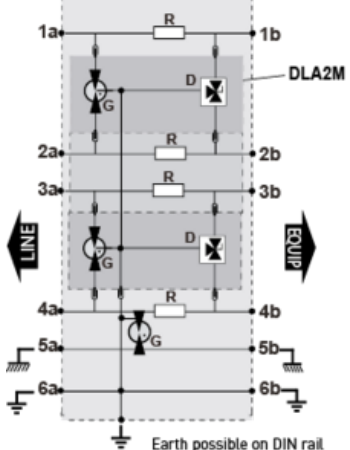

	<b>Electrical Characteristics</b>																																								
 <p style="text-align: center;">Earth possible on DIN rail</p> <p>G: 3-electrode gas tube Gb: 2-electrode gas tube R: Resistor D: Clamping diode</p>	<table border="1"> <tr> <td>Network</td> <td></td> <td>RNIS-T0, 48 V line</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>48 V</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>53 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>&gt; 3 MHz</td> </tr> <tr> <td>Max. load current</td> <td>IL</td> <td>300 mA</td> </tr> <tr> <td>Max. discharge current <i>max. withstand @ 8/20 μs by pole</i></td> <td>I<sub>max</sub></td> <td>20 kA</td> </tr> <tr> <td>Line inductance</td> <td></td> <td>No</td> </tr> <tr> <td>Protection level <i>Following the test category C3 (IEC61643-21) - Line/Line</i></td> <td>Up</td> <td>70 V</td> </tr> <tr> <td>Impulse current <i>2 x 10/350μs Test - D1 Category</i></td> <td>I<sub>imp</sub></td> <td>5 kA</td> </tr> <tr> <td>Nominal discharge current <i>C2 Category</i></td> <td>I<sub>n</sub></td> <td>5 kA</td> </tr> </table>		Network		RNIS-T0, 48 V line	Nominal line voltage	Un	48 V	Max. DC operating voltage	Uc	53 Vdc	Max. frequency	f max.	> 3 MHz	Max. load current	IL	300 mA	Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I <sub>max</sub>	20 kA	Line inductance		No	Protection level <i>Following the test category C3 (IEC61643-21) - Line/Line</i>	Up	70 V	Impulse current <i>2 x 10/350μs Test - D1 Category</i>	I <sub>imp</sub>	5 kA	Nominal discharge current <i>C2 Category</i>	I <sub>n</sub>	5 kA									
Network		RNIS-T0, 48 V line																																							
Nominal line voltage	Un	48 V																																							
Max. DC operating voltage	Uc	53 Vdc																																							
Max. frequency	f max.	> 3 MHz																																							
Max. load current	IL	300 mA																																							
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I <sub>max</sub>	20 kA																																							
Line inductance		No																																							
Protection level <i>Following the test category C3 (IEC61643-21) - Line/Line</i>	Up	70 V																																							
Impulse current <i>2 x 10/350μs Test - D1 Category</i>	I <sub>imp</sub>	5 kA																																							
Nominal discharge current <i>C2 Category</i>	I <sub>n</sub>	5 kA																																							
<b>Mechanical Characteristics</b>																																									
<table border="1"> <tr> <td>Technology</td> <td colspan="2">GDT+Clamping diode</td> </tr> <tr> <td>SPD configuration</td> <td colspan="2">2-pairs+shielded</td> </tr> <tr> <td>Connection to Network</td> <td colspan="2">By screw terminal: cross section 0.5-2.5mm<sup>2</sup></td> </tr> <tr> <td>Format</td> <td colspan="2">Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td colspan="2">Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td colspan="2">Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating and storage temperature</td> <td colspan="2">-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td colspan="2">IP20</td> </tr> <tr> <td>Failsafe mode</td> <td colspan="2">Short-circuit</td> </tr> <tr> <td>Disconnection indicator</td> <td colspan="2">Transmission interrupt - default mode 2</td> </tr> <tr> <td>Spare module(s)</td> <td colspan="2">DLA2M-48D3</td> </tr> <tr> <td>Dimensions</td> <td colspan="2">See diagram</td> </tr> <tr> <td>Weight</td> <td colspan="2">0.089 kg</td> </tr> </table>			Technology	GDT+Clamping diode		SPD configuration	2-pairs+shielded		Connection to Network	By screw terminal: cross section 0.5-2.5mm <sup>2</sup>		Format	Plug-in DIN box		Mounting	Symmetrical rail 35 mm (EN 60715)		Housing material	Thermoplastic UL94 V-0		Operating and storage temperature	-40/+85°C		Protection rating	IP20		Failsafe mode	Short-circuit		Disconnection indicator	Transmission interrupt - default mode 2		Spare module(s)	DLA2M-48D3		Dimensions	See diagram		Weight	0.089 kg	
Technology	GDT+Clamping diode																																								
SPD configuration	2-pairs+shielded																																								
Connection to Network	By screw terminal: cross section 0.5-2.5mm <sup>2</sup>																																								
Format	Plug-in DIN box																																								
Mounting	Symmetrical rail 35 mm (EN 60715)																																								
Housing material	Thermoplastic UL94 V-0																																								
Operating and storage temperature	-40/+85°C																																								
Protection rating	IP20																																								
Failsafe mode	Short-circuit																																								
Disconnection indicator	Transmission interrupt - default mode 2																																								
Spare module(s)	DLA2M-48D3																																								
Dimensions	See diagram																																								
Weight	0.089 kg																																								
<b>Standards</b>																																									
<table border="1"> <tr> <td>Standards compliance</td> <td colspan="2">IEC 61643-21 / EN 61643-21 / UL497A</td> </tr> <tr> <td>Certification</td> <td colspan="2">UL Listed</td> </tr> </table>			Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A		Certification	UL Listed																																		
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A																																								
Certification	UL Listed																																								
<b>Part number</b>																																									
640312																																									